


DICHTKONTAKT Adhesive Tape

To guarantee air and wind-tightness for the skin of a construction it must have the appropriate foils or panel materials providing a permanent seal at overlaps, gaps, joints and penetration points. **DICHTKONTAKT Adhesive Tape** is slightly expandable with adhesive generously applied, is suitable for a variety of bonding applications.

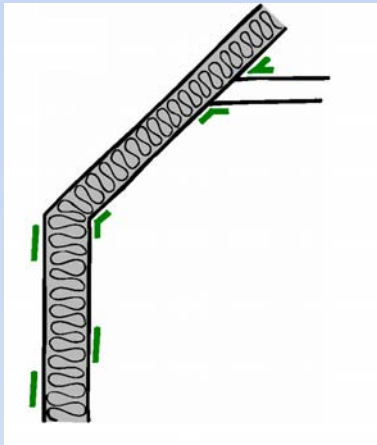


FIELD OF APPLICATION:

- adhesion of vapour retarders and barriers
- joints of OSB and DWD panels indoors and outdoors
- joints and connections with wood, masonry and metal
- for adhesion to masonry use a primer if necessary

ADVANTAGES:

- high proportion of adhesive
- slightly expandable (necessary when there is movement in the construction component)
- adapts to the texture of the surface an, i.e. better adhesion on surfaces that are not smooth

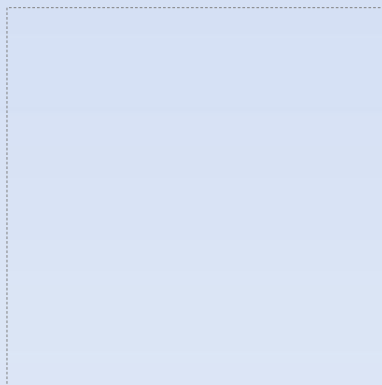

PRODUCT DATA:

Composition:	PE base material with polyester fabric and pure acrylate adhesive	
Roll widths mm:	50	60
Roll length m:	25	25
Rolls / carton :	10	10
Temperature resistance:	- 40°C to + 100°C	
Working temperature:	from - 5°C	
Resistance to ageing:	20 years	
Storage:	2 years, cool and dry	
Colour:	green transparent with DK inprint	

APPLICATION:

The materials used must be free from dust and grease and substrates must be dry and supporting. **The greater the pressure applied, the better the performance of the adhesive tape.** **DICHTKONTAKT Adhesive tape** has the function of sealant and not of a strong connector. The **pure acrylate** adhesive used does not contain resins or other additives that could cause the adhesive film to become brittle and therefore this product is **extremely resistant to ageing.**